## COLORTEC STUCCO

**COLOR & DESIGN INSPIRATION** 





## Timeless elegance

At Hammer Carpets, we fit cruise ships and five star hotels all over the world. Tailored to enhance high-level aesthetics and comforts, our textile floorings beautifully define expressive as well as subtle interior decorations.

Established in 1948, we draw on a solid experience when converging outstanding craftsmanship and cutting-edge technology in our carpet design and production. Swearing by the finest pre-dyed 80/20 wool/nylon quality, we proudly dispatch every single high-quality item from our Danish factory.

Colortec Stucco oozes exclusivity and style with the surface elegantly disrupted into a big patterned floor scape with several dimensions. Though created by the means of advanced technology, the construction features a hint of crafted randomness as if made and carved by hand. With literally all options at your disposal when it comes to patterns and colors, do feel free to play. So, be inspired from the luxurious settings in the brochure that shows you only a small glimpse of your endless possibilities.














Colortec Stucco 14976,5990 E

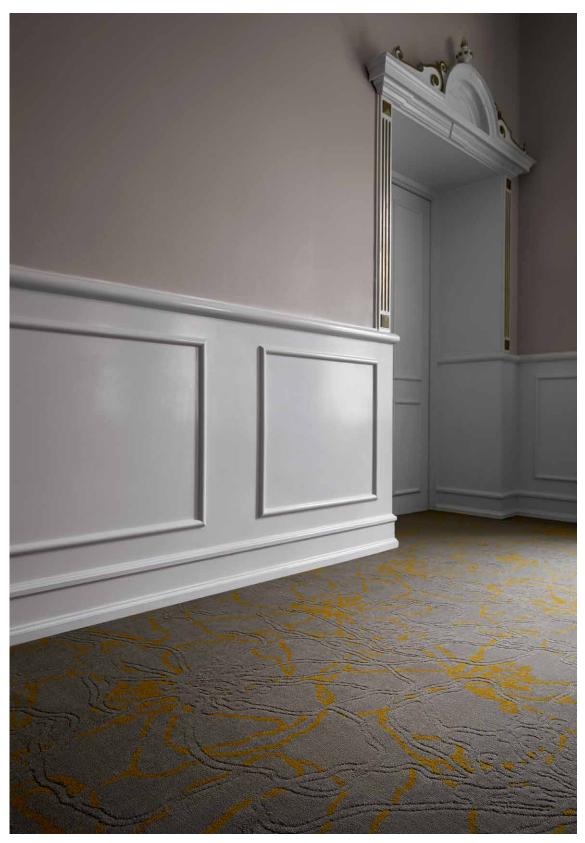

Colortec Stucco 14975,5990 D



Colortec Stucco 14980,5990 I









 Design:
 14976,5990 E

 Size/Repeat:
 100 x 90 cm

 Colors:
 2 colors



 Design:
 14978,5990 G

 Size/Repeat:
 100 x 100 cm

 Colors:
 2 colors







 Design:
 14977,5990 F

 Size/Repeat:
 50 x 46 cm


 Colors:
 3 colors




 Design:
 14981,5990 J

 Size/Repeat:
 200 x 200 cm

 Colors:
 2 colors

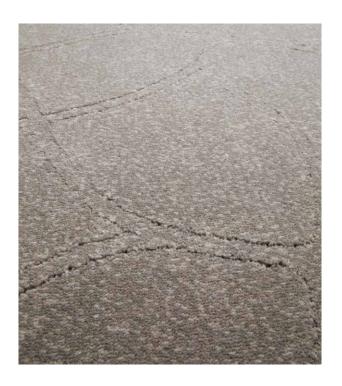

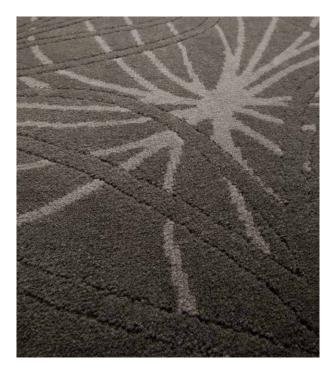



Design: 14974,5990 C Size/Repeat: 50 x 38 cm Colors: 3 colors



 Design:
 14973,5990 B

 Size/Repeat:
 100 x 136.6 cm

 Colors:
 2 colors







 Design:
 14975,5990 D

 Size/Repeat:
 200 x 200 cm

 Colors:
 2 colors




 Design:
 14972,5990 A

 Size/Repeat:
 200 x 78 cm

 Colors:
 3 colors



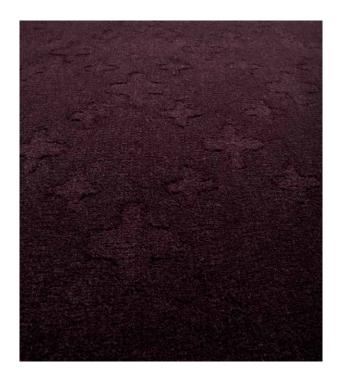



 Design:
 14979,5990 H

 Size/Repeat:
 200 x 207.2 cm

 Colors:
 2 colors



 Design:
 14982,5990 K

 Size/Repeat:
 20 x 20.4 cm

 Colors:
 2 colors







Visualization through realistic carpet prototypes and paper prints eases your decision making process.

## Visualization and wool

To ensure the best possible choice, we supply samples before bringing your unique carpet to life

Throughout the process, we create samples of the proposed design. A small prototype in real materials allows you to feel the exquisite yarn, evaluate the pattern details and sense the impressive color combinations. In addition, a large paper print is supplied to visualize the pattern scale while also giving a realistic impression of the look in full.

Once your design solution has been reached, we turn it into reality. Using only the finest 80/20 wool/nylon yarn, we fit your interior project with a high quality carpet featuring an extremely soft touch and high comfort. The natural lanoline in wool ensures a long lasting natural carpet with a superior look and feel.



## Technical specifications

Product	Method	1500	1800
Structure	ISO 2424	Colortec Tufted Cut Pile	Colortec Tufted Cut Pile
Gauge	ISO 2424	1/7"	1/7"
Pile Material		80% Wool / 20% Nylon	80% Wool / 20% Nylon
Dyeing		Pre-dyed	Pre-dyed
Backing	hctl	Laminated Textile Backing (LTB) Laminated Felt Backing (LFB)	Laminated Textile Backing (LTB) Laminated Felt Backing (LFB)
Dimensions	ISO 3018	400/500 cm	400/500 cm
Pile Height	ISO 1766	7.5 mm	7.5 mm
Total Height	ISO 1765	9 mm (LTB) 13.5 mm (LFB)	9 mm (LTB) 13.5 mm (LFB)
Pile Weight	ISO 8543	1500 g/m²	1800 g/m²
Total Weight	ISO 8543	2060 g/m² (LTB) 2370 g/m² (LFB)	2330 g/m² (LTB) 2640 g/m² (LFB)
Tuft Density	ISO 1763	128744 per m²	131376 per m²
Suitability (use intensity)	EN 1307	33 Heavy Use	33 Heavy Use
Static Control	hctl	Permanent Antistatic	Permanent Antistatic
Suitable for Stairs	EN 1963	Yes	Yes
Suitable for Castor Chairs	EN 985	No	No
Color Fastness to Light	ISO 105-B02	5 (pastel shade 4)	5 (pastel shade 4)
Color Fastness to Wet	ISO 105-X12	3	3
Color Fastness to Dry	ISO 105-X12	3-4	3-4
Guarantee against Wear	hctl	5 Years	5 Years
Fire Classification	EN 13501-1 IMO (USCG) 🍪	Cfl - S1 Certified	Cfl - S1 Certified
EC Standard	EN 14041	Certified	Certified

