

# PARKY®



ENG | 2021

A PRODUCT OF DECOSPAN.

**It's good to live on wood**





## Contents

---

4	<b>It's good to live on wood</b>
8	<b>Why Parky</b>
14	<b>Collection</b>
24	<b>Inspiration</b>
46	<b>Overview</b>
50	<b>Installation and maintenance</b>



**It's good to  
live on wood**



A PRODUCT OF \_DECOSPAN.

Wood is something to love. It brings nature into your home. Due to the uniqueness and characteristics of the trees, not one board is the same. The beauty of imperfections caused by the veins and structure brings life-hood to your floor. Easy to install like a laminate floor, care and maintenance free as vinyl but with the warmth and cosiness of real hard wood.



As sustainable grown wood is getting scarce, we are extremely mindful using it. By using veneers, thinly sliced layers of real wood, we maximize the use of the harvested wood species grown over decades. Reinforcing the thin layers of wood with a 100% wood based High Density Fibre board we create all natural floors which are stronger and way more durable than your classic wooden floor. This combination allows you to live at the fullest on your beautiful wood floors.

Our goal is to make wood floors that inspire. For over 40 years we have innovated our production processes to achieve a rock solid finish; still keeping in mind the natural look and feel of the precious wood species like oak, walnut and some exotics. Everything is made in Belgium, at the heart of Europe, with the help and knowledge of an amazing team. 700 employees around the globe are fully committed to create the floor for your home or project. We are going the extra mile to create fabulous looks, sharp prices with woods full off character. This in order for you to achieve the interior look and feel of your dreams.







**Our Titanium finish has eight robust layers of lacquer. This results in an almost scratch-resistant natural floor designed for intensive use.**





# Why Parky



02

## A sustainable choice

Wood is precious. We use it sparingly: we only use a thin layer of wood for the top finish. We source our trees from **sustainable managed forests** and every board is **100% recyclable**, participating as such in the circular economy. We source energy from solar and wind production. The sawdust and wood waste from our production facility is used to heat the floor space. The future is a CO<sub>2</sub> neutral world.

## Real wood

Feel real wood. Each Parky floor is finished with a **top layer of authentic wood species**. Just like a solid wood floor, no two boards are the same. Oak, teak or other species give that beautiful natural look you are aiming for. The warmth of wood can never be found in fake.

01





## 03

## Waterproof surface

The Parky board has a **waterproof surface**. The combination with the **Aqua Sealing Complete system**, which protects the bevels, gives you a 12 hour waterproof floor. This makes your floor bullet proof for daily spills and drops.



## 04

## High-strength and scratch resistant

### Scratch resistant

Parky floors are ultra-high-strength. Our **Titanium finish** has eight robust layers of lacquer. This makes your floor even more scratch-resistant and ready for intensive use.

### High-strength

Our Titanium finished wood in combination with a core out of **high density fibre board (HDF)**, makes your floor stronger and more dimensionally stable than any traditional solid or engineered wooden floor. Use Parky with peace of mind in the toughest places of your house such as your kitchen or high traffic areas in commercial use such as hotel lobby's, offices, retail stores...



# The secret lies in the well-thought-out structure



## Titanium: the invisible 8-layer varnish

We can call it **Titanium!** Extremely strong due to eight layers of especially developed "bullet" proof lacquer. Your floor will be **resistant to daily wear and tear as well as scratches**, the **pores are moist and dirt resistant**. A **brushed finish** is available allowing you to feel the natural grains and patterns of the wood. This extremely strong and matt lacquer is nearly invisible.



Wood backing for dimensional **stability**.

With Deluxe+ and Royal+ a 2 mm layer of cork provides a **softer footfall sound**.

## Real Wood

On the HDF board we press a **wood wear layer** according to the DSI system (Double sided impregnation). During this process the adhesive gets pressed into the wood. While lacquering the top layer, the wood absorbs the varnish and makes a fusion with the adhesive. The result is a Titanium wooden top layer.

## Strong high-density board

The thinner the wooden top layer, the more resistant the floor is to impact. The HDF just below the wear layer is even **stronger than natural wood**. This allows us to make sure the floor is more resistant to heavy objects or stiletto heels.



Wear layer 0,6 mm oak    Wear layer 2 mm oak    Solid oak





## Completely hygienic

Parky's V grooves are not a hotbed for dust and dirt. Each groove is coloured and sealed with the **Aqua Sealing Complete system**. This **protects your wood against moisture**. Each board also has an **"Ultra-fresh" antibacterial protection** to withhold bacteria from settling into the groove. A hygienic floor is guaranteed.



## Easy to install


Parky, it's as **easy to install as laminate and LVT**. Count on the handy **Uniclic®** and **Unifit X®** system for a problem free result. The warmth and feel good of wood is just a click away.



## Discover even more advantages

### Perfect match with your radiant heating

**Different kinds of radiant heating systems** can be used with Parky. All technical details can be found on our website.



### Floor for healthier indoor air quality.

The Parky floor is only finished with water based stains, adhesives without volatile organic compounds and solvent free paints. It is scientifically proven: indoor **air quality improves** with a Parky floor. All floors have a **A+ quality label**.







**Experience your best moments on a real wooden floor. Imitations such as vinyl or laminate can never match the warmth and uniqueness of real wood. You don't just see it, you feel it...**





# Endless variations with pure nature

- **Your species**  
Wide range of oaks, walnuts and exotic types of wood.
- **Your patterns**  
From straight boards to a herringbone pattern.
- **Your sizes**  
Boards in different lengths and widths, with or without a 2 mm cork underlayer.

# Pick your colour

## Oaks



European Oak



Essence Oak



Ivory Oak



Crystal Oak



Silk Oak



Milk Oak



Sky Oak



Desert Oak



Dune Oak



Umber Oak

You prefer antique oak boards or wood with a distinct character? From rich chocolate brown to milky white, we'll be happy to help you choose the right colour.




Valley Oak



Antique Oak



Mountain Oak

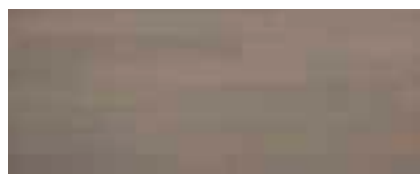

Manhattan Oak



Chocolate Oak



---

## Walnuts



Frozen Walnut



Smoked Walnut



Stardust Walnut

---

## Character Woods



Cotton Triba



Bamboo Steamed



Teak



Rosewood Santos



Jatoba

# The uniqueness of oak

There are plenty of oak options. Pure oaks give you the emphasis of a pure and clean look; the rustic variant has a more pronounced character thanks to the knots. It's up to you to choose the look and feel you want whether you go for a 0.6 or 2 mm wooden top layer.

## **PREMIUM**

We only use the purest 0.6 mm veneer wood for our Premium boards. Exceptionally pure quality from the very best of nature.

## **SELECT**

This 2 mm wear layer is a beautiful, natural blend of structures and slightly more pronounced wood grains. The perfect natural look.



Pure Oak



**More information regarding the possible combinations of colour, style, size or wear layer can be found on page 46**

## **RUSTIC LIGHT**

This rustic wooden floor seeks the balance between smaller and larger knots for a more pronounced pattern.

## **RUSTIC NATURE**

Bring nature into your home with this intensely rustic floor: the knots and the natural character are strikingly present.



Rustic Oak






# The pattern that suits you

Parky offers you endless combinations. Whatever pattern you choose, it remains timeless, from ultra-sleek villas to stately mansions and everything in between. Different lengths and widths offer a wide range of choices: from a classically laid board floor to a herringbone pattern. Even an elegant double herringbone pattern is possible.




Deluxe+ 06 Desert Oak Premium

Herringbone



Double herringbone



Available as pattern floor



European Oak



Ivory Oak



Desert Oak



Smoked Walnut



Calculate how many boards you need with our handy Pattern Calculator at [patterns.par-ky.com](https://patterns.par-ky.com)



Which colour and style can be combined can be found in the overview on page 46



Calculate how many boards you need with our handy Pattern Calculator at [patterns.par-ky.com](https://patterns.par-ky.com)









The **size of the room** determines the size of your boards. For smaller rooms, opt for narrow, short boards. For larger spaces, wider and longer boards are the way to go. The direction also affects the end result. If you lay out your boards lengthwise, your room looks bigger.

We'll give you **eight possible sizes** to work with. Don't worry if you find it difficult to choose, feel free to ask your distributor for advice.


**Two click systems**

All our floors are equipped with the handy **Uniclic®** or **Unifit X®** system, which makes installation as easy as it can be. With the Unifit X® fold-down option, you can even save 30% on installation time. All the advantages of a click laminate, but with the difference that you feel the warmth of real wood under your feet.

Board floors					
Wear layer 0.6 mm	<b>Pro 06</b>		1203 x 190 x 7.2 mm (47-3/8 x 7-1/2 x 9/32 inch)	UNICLIC®	
	<b>Lounge 06</b>		1203 x 124 x 8.3 mm (47-3/8 x 4-7/8 x 5/16 inch)		
	<b>Master 06</b>		1506 x 166 x 10 mm (59-5/16 x 6-1/2 x 3/8 inch)	UNIFIT X® PATENTED TECHNOLOGY	
	<b>Deluxe+ 06</b>		1810 x 166 x 12 mm (71-1/4 x 6-1/2 x 1/2 inch)		incl. 2 mm cork
	<b>Summit 06</b>		2050 x 233 x 10 mm (80-3/4 x 9-1/8 x 3/8 inch)		
Wear layer 2 mm	<b>Classic 20</b>		1185 x 148 x 10 mm (46-5/8 x 6 x 3/8 inch)	UNIFIT X® PATENTED TECHNOLOGY	
	<b>Royal+ 20</b>		1935 x 195 x 12 mm (76-1/8 x 7-5/8 inch x 1/2 inch)		incl. 2 mm cork
Pattern floor					
Wear layer 0.6 mm	<b>Swing 06</b>		593 x 121 x 10 mm (23-3/8 x 4-3/4 x 3/8 inch)	UNIFIT X® PATENTED TECHNOLOGY	
			Herringbone		
			Double herringbone		

# Floors made to live on



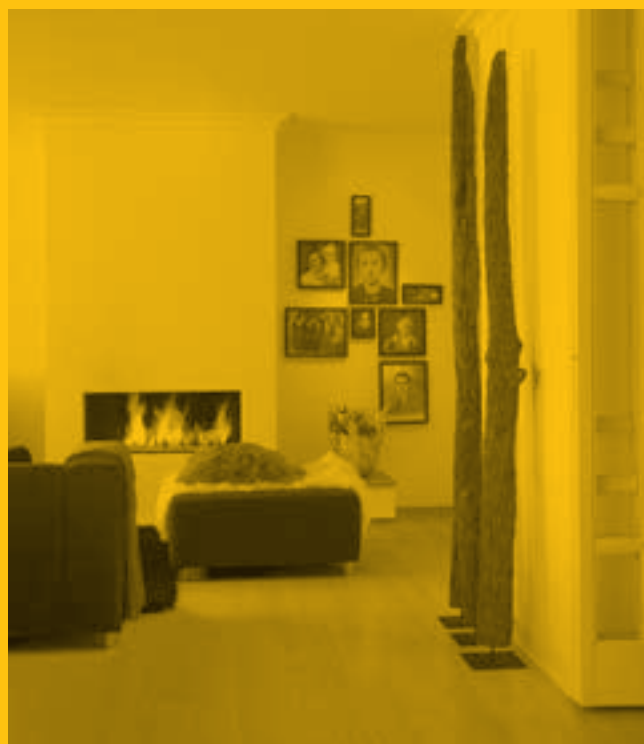

Each wood specie has its own character that can match your personality or taste. You can choose out of more than 20 colours, a range of patterns and sizes until you find the wooden floor that fits perfectly into your interior. Sleek and subtle, rustic for a pronounced touch or an exotic wood – you decide.









Classic 20 **Essence Oak Rustic Light**

**Long, wide boards are ideal for larger spaces**



Deluxe+ 06 **Chocolate Oak Premium**







Lounge 06 Cotton Triba



## The finish that gives your wooden floor a touch of perfection

We finish each board with a **Titanium finish**. Eight layers of high-strength lacquer that makes your wood almost "bullet" proof. This makes the surface **waterproof, protects pores in the wood** and makes it **easy to maintain**.

Our **brushed** finish accentuates the natural structure of the wood and gives the grain a beautiful appearance. On top, these brushed floors have a matt finish, giving them a very natural look. Exotic types of wood, on the other hand, are more attractive with a flat, glossy finish and are given a **sealed** finish.





Summit 06 Stardust Walnut







Can also be installed in  
double herringbone





Classic 20 Ivory Oak Select



Pro 06 Ivory Oak Rustic Light









## Commercially rated floors

Parky floors are made to live up to their full potential. This also makes them suitable for places where there is a lot of traffic, such as an office or retail. Lots of traffic isn't a problem: thanks to a high-quality finish in class 33, our floors are made for intensive use.








Summit 06 Dune Oak Premium







**Live life to the fullest  
and enjoy every piece  
of floor. The colour,  
the structure, the  
warmth of real wood.**













Matching skirtings  
available for the full  
range


Lounge 06 **Rosewood Santos**



Lounge 06 **Jatoba**



Lounge 06 **Bamboo Steamed**



Lounge 06 **Teak**



Summit 06 **Sky Oak Premium**






# Oaks



**PARKY**<sup>®</sup>

## BOARD FLOOR 0.6 MM

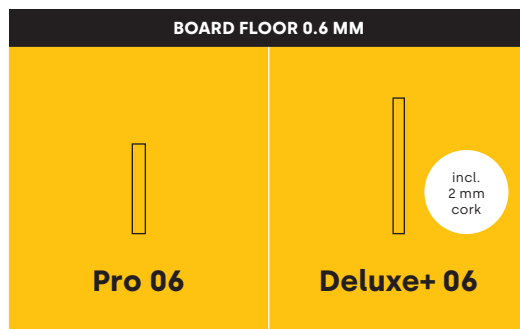

**Pro 06**

**Deluxe+ 06**

**Usage classification\***


















		Pro 06	Deluxe+ 06	
<b>Board</b>	<b>Dimensions</b>	1203 × 190 mm 47-3/8 × 7-1/2 inch	1810 × 166 mm 71-1/4 × 6-1/2 inch	
	<b>Thickness</b>	7.2 mm 9/32 inch	12 mm 1/2 inch	
	<b>Wear layer</b>	0.6 mm	0.6 mm	
	<b>Click system</b>	<b>UNICLIC</b> <sup>®</sup>	<b>UNIFIT</b> <sup>®</sup> PATENTED TECHNOLOGY	
	<b>Box</b>	<b>Boards</b>	11	7
	<b>Surface area</b>	2.514 m <sup>2</sup> 27.06 sq.ft	2.103 m <sup>2</sup> 22.64 sq.ft	
	<b>Weight</b>	16,30 kg	17.70 kg	
<b>Finish</b>	<b>Bevel</b>	Maxi +/- 1,5 mm	-	2
		Mini +/- 0,5 mm	4	2
	<b>Gloss</b>	Super matt (3%)	Super matt (3%)	
	<b>Structure</b>	Brushed	Brushed	

<b>European Oak</b>	Premium	<b>PRB101</b>	<b>DEXB+101</b>
	Rustic Light	<b>PRB135</b>	
<b>Ivory Oak</b>	Premium	<b>PRB102</b>	<b>DEXB+102</b>
	Select		
	Rustic Light	<b>PRB110</b>	<b>DEXB+110</b>
	Rustic Nature		
<b>Milk Oak</b>	Premium	<b>PRB103</b>	<b>DEXB+103</b>
	Rustic Light	<b>PRB137</b>	<b>DEXB+137</b>
<b>Desert Oak</b>	Premium	<b>PRB104</b>	<b>DEXB+104</b>
	Select		
	Rustic Light	<b>PRB116</b>	<b>DEXB+116</b>
	Rustic Nature		
<b>Umber Oak</b>	Premium	<b>PRB134</b>	<b>DEXB+134</b>
	Rustic Light	<b>PRB136</b>	<b>DEXB+136</b>
<b>Antique Oak</b>	Premium	<b>PRB106</b>	<b>DEXB+106</b>
<b>Manhattan Oak</b>	Premium	<b>PRB113</b>	<b>DEXB+113</b>
<b>Chocolate Oak</b>	Premium	<b>PRB108</b>	<b>DEXB+108</b>
<b>Crystal Oak</b>	Premium	<b>PRB170</b>	<b>DEXB+170</b>
<b>Essence Oak</b>	Premium		
	Select		
	Rustic Light		
	Rustic Nature		
<b>Silk Oak</b>	Premium		
	Select		
	Rustic Light		
	Rustic Nature		
<b>Dune Oak</b>	Premium		
<b>Sky Oak</b>	Premium		
<b>Valley Oak</b>	Premium		
	Rustic Light		
<b>Mountain Oak</b>	Premium		
	Rustic Light		

\* Usage classification 31: residential + low commercial. Usage classification 33: residential + high commercial.



BOARD FLOOR 0.6 MM		BOARD FLOOR 2 MM		PATTERN FLOOR 0.6 MM
			 <span>incl. 2 mm cork</span>	
<b>Master 06</b>	<b>Summit 06</b>	<b>Classic 20</b>	<b>Royal+ 20</b>	<b>Swing 06</b>
				
1506 × 166 mm 59-5/16 × 6-1/2 inch	2050 × 233 mm 80-3/4 × 9-1/8 inch	1185 × 148 mm 46-5/8 × 6 inch	1935 × 195 mm 76-1/8 × 7-5/8 inch	593 × 121 mm 23-3/8 × 4-3/4 inch
10 mm 3/8 inch	10 mm 3/8 inch	10 mm 3/8 inch	12 mm 1/2 inch	10 mm 3/8 inch
0.6 mm	0.6 mm	2 mm	2 mm	0,6 mm
				
8	5	9	6	11
2.000 m <sup>2</sup> 21.53 sq.ft	2.388 m <sup>2</sup> 25.7 sq.ft	1.578 m <sup>2</sup> 17 sq.ft	2.264 m <sup>2</sup> 24.37 sq.ft	0.789 m <sup>2</sup> 8.49 sq.ft
17.3 kg	19.20 kg	13.50 kg	18.80 kg	6.9 kg
-	2	-	-	-
4	2	4	4	4
Super matt (3%)	Super matt (3%)	Matt (10%)	Matt (10%)	Super matt (3%)
Brushed	Brushed	Brushed	Brushed	Brushed
				<b>SWXB101</b>
				<b>SWXB102</b>
		<b>CX20S102</b>		
		<b>CX20RL102</b>	<b>RX+20RL102</b>	
		<b>CX20RN102</b>		
				<b>SWXB104</b>
		<b>CX20S104</b>		
		<b>CX20RL104</b>	<b>RX+20RL104</b>	
		<b>CX20RN104</b>		
<b>MAXB188</b>	<b>SUXB188</b>	<b>CX20S188</b>		
		<b>CX20RL188</b>	<b>RX+20RL188</b>	
		<b>CX20RN188</b>		
<b>MAXB193</b>	<b>SUXB193</b>	<b>CX20S193</b>		
		<b>CX20RL193</b>	<b>RX+20RL193</b>	
		<b>CX20RN193</b>		
<b>MAXB197</b>	<b>SUXB197</b>			
<b>MAXB196</b>	<b>SUXB196</b>			
<b>MAXB194</b>				
	<b>SUXB198</b>			
<b>MAXB195</b>				
	<b>SUXB199</b>			

# Walnuts & Character Woods

BOARD FLOOR 0.6 MM



Pro 06

Usage  
classification\*



<b>Board</b>	<b>Dimensions</b>	1203 x 190 mm 47-3/8 x 7-1/2 inch
	<b>Thickness</b>	7.2 mm 9/32 inch
	<b>Wear layer</b>	0.6 mm
	<b>Click system</b>	<b>UNICLIC®</b>
<b>Box</b>	<b>Boards</b>	11
	<b>Surface area</b>	2.514 m <sup>2</sup> 27.06 sq.ft
	<b>Weight</b>	16.30 kg
<b>Finish</b>	<b>Bevel</b>	Maxi +/- 1,5 mm - Mini +/- 0,5 mm 4
	<b>Gloss</b>	Super matt (3%)
	<b>Structure</b>	Brushed

## Walnuts

Smoked Walnut PRB203

Frozen Walnut

Stardust Walnut

## Character Woods

Cotton Triba

Jatoba

Bamboo Steamed

Teak

Rosewood Santos





# These handy tools make it as easy as it can be to install



You will find the installation instructions on each package, on the site and via this QR code

## Installation kit

Installing Parky is easy. With our installation kit you have all the necessary tools to install your floor quickly and without damage: spacers to respect the expansion joint, a pull bar and a tapping block.



## Choose the right underlay

### Damp foil (150 micron, 25m<sup>2</sup>/pack)

- This damp foil serves as a vapour barrier and can only be used on Parky floors with an integrated cork layer (Deluxe+ 06 and Royal+ 20). Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



### Basic underlay (2 mm thick, 20m<sup>2</sup>/roll)

- This affordable and high-quality underlay guarantees a comfortable sound absorption and offers a contact sound insulation improvement of 19 dB.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



### Silent underlay (2 mm thick, 20m<sup>2</sup>/roll)

- This premium underlay guarantees a maximum sound absorption and offers a contact sound insulation improvement of at least 20 dB.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



## Waterproof tape



Protecting your floor against rising moisture is a must. We recommend you use Parky's tested waterproof tape to glue your underlay together. It's the only way to protect the backside of the floor.



# This is how you finish your floor to the last detail

## Veneer skirtings

The crowning glory: a matching wooden moulding.

**Veneer skirtings dimensions:**


2150 × 80 × 12 mm

84.6 × 3.2 × 15/32 inch



## Paintable skirtings

Choose white paint baseboards if you want a clean, modern look. You can easily paint the baseboards in the same colour as the wall.



**Paintable skirtings dimensions:**

2150 × 69 × 12 mm

84.6 × 2.7 × 1/2 inch

## Profiles

### Wooden profile (residential applications)

This handy 3-in-1 profile is available in all Parky colours.

Particularly useful as

- End profile (jointless horizontal finish)
- Reducer profile (to bridge the gap with a lower floor)
- T-profile (expansion profile)

**Dimensions profile:**

2150 × 48 × 13 mm


84-5/8 × 1 7/8 × 33/64 inch



1. End profile



2. Reducer profile



3. T-profile

### Aluminium profiles (commercial applications)

We developed aluminium profiles that are stronger than the wooden variant. Ideal for intensive use.

**Dimensions profile:**

- Connecting profile 900 × 38 mm - 35.4 × 1.5 inch
- End profile 2700 × 30 mm - 106.3 × 1.9 inch



Connecting profile



End profile



# How to keep your floor in a fabulous shape

You can count on the Parky cleaner to clean your floor without damaging the varnish. It was specially developed to remove dirt and protect your wood.



## Wood Floor Cleaner

1000 ml

Dilute the cleaner with water.  
Clean your floor with a slightly damp cloth.

## Repair Pens



Repair small scratches in a jiffy. Boxes with one or two pens are available, depending on the colour of your floor. Once repaired, no more dirt can penetrate the scratch.

## Repair Wax

Using the Repair Wax you can repair dents that come through the paint. The wax repairs the damage and protects your floor against penetrating moisture. The Repair Wax kit contains seven wax blocks, a melting knife and a spatula.



## Severe damage? Not a disaster

Thanks to the clic system, you can easily replace a board in your floor. Consult your distributor or replace your board yourself.

*The complete manual of our maintenance products and tutorials for replacing a board can be found at [www.par-ky.com](http://www.par-ky.com)*





		TEST METHOD	PRO 06	LOUNGE 06
<b>Wood veneer floor covering</b>		EN14354/EN14352		
<b>Domestic usage classification</b>		EN685	Class 23	Class 23
<b>Commercial usage classification</b>		EN685	Class 31	Class 33
<b>Warranty</b>		DECOSPAN nv	Residential use: 15 years Low commercial use: 5 years	Residential use: limited lifetime warranty Commercial use: 10 years
<b>CE certification</b>		EN14342	EN14342:2013	EN14342:2013
<b>Dop n°</b>			19005	19006
<b>GENERAL PROPERTIES</b>				
<b>Moisture content</b>		EN322	6 % (+/-1)	6 % (+/-1)
<b>Dimensions of floor boards</b>		EN14354	1203 x 190 x 7.2mm	1203 x 124 x 8.3 mm
<b>Thickness of the wear layer</b>		EN14354	0.6 mm	0.6 mm
<b>Deviation of thickness</b>		EN14354	≤0.5 mm	≤0.5mm
<b>Deviation of squareness</b>		EN324-2	≤0.2 mm	≤0.2 mm
<b>Cup in width direction</b>		EN14354	≤0.2 %	≤0.2 %
<b>Flatness deviation</b>			4%	4%
<b>Internal bond</b>		EN319	> 1.4 N/mm <sup>2</sup>	> 1.4 N/mm <sup>2</sup>
<b>Veneer glueing adhesion</b>		EN204/205	≥ 1 N/mm <sup>2</sup>	≥ 1 N/mm <sup>2</sup>
<b>Mechanical connection system</b>			Uniclic®	Uniclic®
<b>Opening between elements</b>		EN14354	≤ 0.2 mm	≤ 0.2 mm
<b>Tensile strength on short end</b>		ISO24334	> 2000 N/lm	> 2000 N/lm
<b>Density</b>		EN323/EN672	900	850
<b>Weight/m<sup>2</sup></b>			7 kg	8 kg
<b>CLASSIFICATION PROPERTIES</b>				
<b>Thickness distention</b>		EN 13329 annex G	< 13%	< 10 %
<b>Resistance to indentation</b>		EN 1534	≥ 30 N/mm <sup>2</sup>	≥ 40 N/mm <sup>2</sup>
<b>Resistance to abrasion</b>		EN 14354//EN112,73.XX	> 3000 rev.	> 6000 rev.
<b>Impact resistance</b>		EN 438-2.2IEC2	> 1200 (EC2)	> 1200 (EC2)
<b>Adhesion of the lacquer</b>		EN ISO 2409	class < 2	class < 2
<b>Resistance to chemical agents</b>		EN 423/part 2	grade 4*	grade 4*
<b>ADDITIONAL PROPERTIES</b>				
<b>Appearance of the lacquer</b>		EN 438/2-5	ok	ok
<b>Gloss</b>		EN 2813	super matt 3% (+/- 1)	super matt 3% (+/- 1) / satin 20% (+/-5)
<b>Hardness of the lacquer</b>		DIN 53154	≥ 3 Newton	≥ 4 Newton
<b>Residual indentation</b>		EN 433	< 0.05 mm	< 0.05 mm
<b>Impact resistance acc. to Wegner</b>		EN 438-2/11	≥ 5 Newton	≥ 8 Newton
<b>Elasticity of the lacquer</b>		CEN/TC112 (Brinell)	2 Hb	2 Hb
<b>Colour fastness</b>		EN 105-B02	grade > 6	grade > 6
<b>Castor chair resistance</b>		EN 425	no visible change	no visible change
<b>Underfloor heating</b>			OK	OK
<b>Thermal resistance</b>		EN 12667	0.053 m <sup>2</sup> K/W	0.059 m <sup>2</sup> K/W
<b>Thermal conduction</b>		EN 12667	0.14 W/mK	0.14 W/mK
<b>Normalized impact sound pressure level</b>		ISO 10140-3 & 717-2 (Ln,w)	55 dB	57 dB
<b>Reduction of impact sound pressure level</b>		ISO 10140-3 & 717-2 (ΔLw)	20 dB	18 dB
<b>A-weighted walking noise</b>		EN 16205:2018 (Ln,walk,A)	91 dB (A)	91 dB (A)
<b>Loudness of reflected walking noise</b>		EN16205:2018 Loudness RWS	68.7 sone	69.7 sone
<b>Antistatic performance</b>		EN 1815	< 2 kV (antistatic)	< 2 kV (antistatic)
<b>Biological durability</b>		EN 335-1/EN335-2	Class 1	Class 1
<b>Well-managed forests</b>			FSC® certified*** (optional)	FSC® certified*** (optional)
<b>Resistance to termites</b>			good	good
<b>Resistance to bacteria</b>			Ultrafresh	Ultrafresh
<b>Recycling</b>			ok	ok
<b>Martindale test (scratch resistance)</b>		EN16094	B3	B1-2
<b>SAFETY PROPERTIES</b>				
<b>VOC loss</b>		French legislation ISO16000	A+	A+
<b>VOS M1 EU</b>			Pass	Pass
<b>VOS LEED VA/CDPH</b>			Compliant	Compliant
<b>VOS BREEAM</b>			Compliant	Compliant
<b>VOS Indoor air comfort GOLD</b>			Pass	Pass
<b>Formaldehyde emission</b>		E1 (EN 717-1)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)
<b>Formaldehyde emission</b>		E1 (EN 717-2)	Class E1 (<3.5 mg/m <sup>3</sup> h)	Class E1 (<3.5 mg/m <sup>3</sup> h)
<b>Formaldehyde emission</b>		ASTM E 1333-96	CARB 2	CARB 2
<b>Exudation of plasticizers</b>		EN 665	0%	0%
<b>PCP (pentachlorophenol)</b>		CEN/TR 14823	PCP free	PCP free
<b>Burning cigarette</b>		EN 438-2/30	Class 3**	Class 3**
<b>Fire reaction and smoke generation</b>		EN 13501-1	Class Cfl S1 (Bfl S1 on demand)	Class Cfl S1 (Bfl S1 on demand)
<b>Slip resistance (dry)</b>		CEN TS15676: 2017 (pendulum test)	62.25 USRV (average)	62.25 USRV (average)
<b>Slip resistance (wet)</b>		CEN TS15676: 2017 (pendulum test)	47.75 USRV (average)	47.75 USRV (average)

MASTER 06	DELUXE+ 06	SUMMIT 06	SWING 06	CLASSIC 20	ROYAL+ 20
Class 23	Class 23	Class 23	Class 23	Class 22	Class 22
Class 33	Class 33	Class 33	Class 33	Class 31	Class 31
Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: 15 years Low commercial use: 5 years	Residential use: 15 years Low commercial use: 5 years
EN14342:2013	EN14342:2013	EN14342:2013	EN14342:2013	EN14342:2013	EN14342:2013
19003	19007	19004	19010	19008	19009
6 % (+/-1)	6 % (+/-1)	6 % (+/-1)	6 % (+/-1)	8 % (+/-1)	8 % (+/-1)
1506 x 166 x 10 mm	1810 x 166 x 12 mm	2050 x 233 x 10 mm	593 x 121 x 10mm	1185 x 148 x 10 mm	1935 x 195 x 12 mm
0.6 mm	0.6 mm	0.6 mm	0.6 mm	2 mm	2 mm
≤0.5mm	≤0.5mm	≤0.5mm	≤0.5mm	≤0.5mm	≤0.5mm
≤0.2 mm	≤0.2 mm	≤0.2 mm	≤0.2 mm	≤0.2 mm	≤0.2 mm
≤0.2 %	≤0.2 %	≤0.2 %	≤0.2 %	≤1 %	≤1 %
3%	3%	3%	3%	4%	4%
> 1.3 N/mm <sup>2</sup>	> 1.3 N/mm <sup>2</sup>	> 1.3 N/mm <sup>2</sup>	> 1.3 N/mm <sup>2</sup>	> 1.3 N/mm <sup>2</sup>	> 1.3 N/mm <sup>2</sup>
≥ 1 N/mm <sup>2</sup>	≥ 1 N/mm <sup>2</sup>	≥ 1 N/mm <sup>2</sup>	≥ 1 N/mm <sup>2</sup>	≥ 1 N/mm <sup>2</sup>	≥ 1 N/mm <sup>2</sup>
Unifit X®	Unifit X®	Unifit X®	Unifit X®	Unifit X®	Unifit X®
≤ 0.2 mm	≤ 0.2 mm	≤ 0.2 mm	≤ 0.2 mm	≤ 0.2 mm	≤ 0.2 mm
> 2000 N/lm	> 2000 N/lm	> 2000 N/lm	> 2000 N/lm	> 2000 N/lm	> 2000 N/lm
850	850	850	850	850	850
7 kg	10 kg	7 kg	7 kg	8 kg	10 kg
< 10 %	< 10 %	< 10 %	< 10 %	< 10 %	< 10 %
≥ 40 N/mm <sup>2</sup>	≥ 40 N/mm <sup>2</sup>	≥ 40 N/mm <sup>2</sup>	≥ 40 N/mm <sup>2</sup>	≥ 30 N/mm <sup>2</sup>	≥ 30 N/mm <sup>2</sup>
> 6000 rev.	> 6000 rev.	> 6000 rev.	> 6000 rev.	> 3000 rev.	> 3000 rev.
> 1200 (EC2)	> 1200 (EC2)	> 1200 (EC2)	> 1200 (EC2)		
class < 2	class < 2	class < 2	class < 2	class < 2	class < 2
grade 4*	grade 4*	grade 4*	grade 4*	grade 4*	grade 4*
ok	ok	ok	ok	ok	ok
super matt 3% (+/- 1)	super matt 3% (+/- 1)	super matt 3% (+/- 1)	super matt 3% (+/- 1)	matt 10% (+/- 5)	matt 10% (+/- 5)
≥ 4 Newton	≥ 4 Newton	≥ 4 Newton	≥ 4 Newton	≥ 2 Newton	≥ 2 Newton
< 0.05 mm	< 0.05 mm	< 0.05 mm	< 0.05 mm	< 0.05 mm	< 0.05 mm
≥ 8 Newton	≥ 8 Newton	≥ 8 Newton	≥ 8 Newton	≥ 2.5 Newton	≥ 2.5 Newton
2 Hb	2 Hb	2 Hb	2 Hb	2 Hb	2 Hb
grade > 6	grade > 6	grade > 6	grade > 6	grade > 6	grade > 6
no visible change	no visible change	no visible change	no visible change		
OK	OK	OK	OK	OK but glued	OK but glued
0.073 m <sup>2</sup> K/W	0.109 m <sup>2</sup> K/W	0.073 m <sup>2</sup> K/W	0.073 m <sup>2</sup> K/W	0.070 m <sup>2</sup> K/W	0.100 m <sup>2</sup> K/W
0.14 W/mK	0.11 W/mK	0.14 W/mK	0.14 W/mK	0.14 W/mK	0.11 W/mK
56 dB	60 dB	56 dB	56 dB	56 dB	57 dB
19 dB	15 dB	19 dB	19 dB	18 dB	17 dB
94 dB (A)	97 dB (A)	94 dB (A)	94 dB (A)	94 dB (A)	97 dB (A)
80.3 sone	96.1 sone	80.3 sone	80.3 sone	81.3 sone	96.7 sone
< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)
Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)
good	good	good	good	good	good
Ultrafresh	Ultrafresh	Ultrafresh	Ultrafresh	Ultrafresh	Ultrafresh
ok	ok	ok	ok	ok	ok
B1-2	B1-2	B1-2	B1-2		
A+	A+	A+	A+	A+	A+
Pass	Pass	Pass	Pass	Pass	Pass
Compliant	Compliant	Compliant	Compliant	Compliant	Compliant
Compliant	Compliant	Compliant	Compliant	Compliant	Compliant
Pass	Pass	Pass	Pass	Pass	Pass
Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)	Class E1 (<0.13 ppm)
Class E1 (<3.5 mg/m <sup>3</sup> h)	Class E1 (<3.5 mg/m <sup>3</sup> h)	Class E1 (<3.5 mg/m <sup>3</sup> h)	Class E1 (<3.5 mg/m <sup>3</sup> h)	Class E1 (<3.5 mg/m <sup>3</sup> h)	Class E1 (<3.5 mg/m <sup>3</sup> h)
CARB 2	CARB 2	CARB 2	CARB 2	CARB 2	CARB 2
0%	0%	0%	0%	0%	0%
PCP free	PCP free	PCP free	PCP free	PCP free	PCP free
Class 3**	Class 3**	Class 3**	Class 3**	Class 3**	Class 3**
Class CfI S1 (BfI S1 on demand)	Class CfI S1 (BfI S1 on demand)	Class CfI S1 (BfI S1 on demand)	Class CfI S1 (BfI S1 on demand)	Class DfI s1	Class DfI s1
62.25 USRV (average)	62.25 USRV (average)	62.25 USRV (average)	62.25 USRV (average)	62.25 USRV (average)	62.25 USRV (average)
47.75 USRV (average)	47.75 USRV (average)	47.75 USRV (average)	47.75 USRV (average)	47.75 USRV (average)	47.75 USRV (average)

\* 1=surface destruction, 5=no visibel changes / \*\* class 3 = moderate change of gloss level and/or moderate brown spot / \*\*\* FSC C095327



# It's good to live on wood

Choosing a floor isn't just something you use your eyes for. You have to be able to feel it and experience for yourself what the effect of each type of wood and finish is. Count on our experts, who will be happy to put their savoir-faire at your disposal to help you.



#### Quickly find a store near you?

Scan the code or go to  
[www.par-ky.com/en/dealers](http://www.par-ky.com/en/dealers)



#### Need more inspiration?

Follow us on Instagram  
[@parkyfloors](https://www.instagram.com/parkyfloors) #myPARKYfloor

## **PARKY**<sup>®</sup>

Decospan nv  
Industriezone Grenslan  
Lageweg 33  
8930 Menen - Belgium  
tel +32 56 52 88 49  
[info@par-ky.com](mailto:info@par-ky.com)

© Decospan 2021 - Nothing from this brochure may be reproduced without written prior permission. Please note that the information in this brochure may be outdated and a new version may already have been issued. That is why we recommend you to always consult our website to download the most recent version. The photos of the different wood species, as shown in this brochure, are a representation of a unique part of wood and are not binding for future deliveries. Decospan is committed to the continuous improvement of its products and services, therefore the actual products may differ from the products and pictures in this brochure. Decospan disclaims any liability pursuant to the variations that may occur between the products and pictures in this brochure and the actual products. All content in this brochure is for information purposes only and no rights can be obtained therefrom.

Proudly  
made in  
Belgium

a product of  
**DECOSPAN**  
Wood Solutions